

LOTS OF OPTIONS, JUST ONE CHOICE.



lae[®]
ELECTRONIC

2009

SHORT FORM CATALOGUE

NEW PRODUCTS CATALOGUE

TEMPERATURE, HUMIDITY, PRESSURE

LTR-5, ACI-5	Page	4
ACI-27, ACI-2W	Page	5

REFRIGERATION, DEFROST

AT1-5, AT2-5	Page	6
AD3-5, AR1-5	Page	7
AR2-27, AD-32	Page	8
AH1-5, AT2-2W	Page	9
AD2-28, AR2-28	Page	10

PRESSURE: COMPRESSOR PACK CONTROLLER

MS27, ME27	Page	11
------------	------	----

GENERAL CATALOGUE

TEMPERATURE, HUMIDITY

MTR6, LLC1SE	Page	12
LT12, LTS12	Page	13

TIMERS

TMR15, TIMER12	Page	14
----------------	------	----

MONITORING SOFTWARE, WIRELESS COMMUNICATION, WEB SERVER

TAB4.2	Page	15
SWB	Page	16
iLON100	Page	17

PROBES: TEMPERATURE, HUMIDITY, PRESSURE

SN2K, SN4K, ST1K, ST1N	Page	18
HT2WAD, HT2WSE	Page	18
PGT35	Page	19

FIXING BAR

S-28-FB	Page	19
---------	------	----

PROGRAMMING KEY

ZOT	Page	18
-----	------	----

TRANSFORMERS

TR230, TR230F, TR240, TR110, TR115, TR24/12V	Page	19
TRE24	Page	19

For further information and documents on all LAE products, see our web page www.lae-electronic.com

In line with our continual product improvement policy, the company reserves the right to make changes without prior notice.

* The products and names of the listed companies are registered trademarks or brand names of the respective companies.

SPECIALISTS IN CUSTOMISED PRODUCTS FOR OEMs

In addition to its standard products, **LAE electronic** has always designed, developed and fabricated custom-made cards for controlling temperature, defrosting, fans, alarms, etc.

Our major asset is the capacity to provide expert, reliable advice for making controllers that fully satisfy customer expectations and requirements with regard to functions, performance, size, appearance and cost.

This has allowed us to establish working relations with world-renowned companies, which include:

AISBERG	commercial refrigeration	Ukraine
CARRIER	commercial refrigeration	Italy
COOL COMPACT	refrigeration	Germany
DOMETIC	refrigeration	Sweden
EPTA GROUP	commercial refrigeration	Italy, Austria, France
EUROTEC DEXION	refrigeration	Italy
FOSTER REFRIGERATOR	refrigeration	Great Britain
FRIULAIR	Compressed air equipment	Italy, Thailand
GINIS GINIDIS	refrigeration	Greece
HAUSER	commercial refrigeration	Austria
HOLLAND	refrigeration	Germany
IDEAL KÄLTETECHNIK	refrigeration	Austria
JORDAO	Cooling Systems commercial refrigeration	Portugal
MARVEL-NORTHLAND INC.	refrigeration	U.S.A.
POLESTAR	medical refrigeration	Great Britain
SEAKING	refrigeration	Poland
SPLENDID OLIMPIA	air conditioning	Italy
WILLIAMS REFRIGERATION	refrigeration	Great Britain, China

LTR-5

77x35x77mm

SINGLE OUTPUT ON/OFF OR PID THERMOSTAT OR HUMIDISTAT

Runs on mains power supply • PID with autotuning or ON/OFF control • Output on relay (16A) or SSR piloting • Input for PTC, NTC10K or 0÷1V • 0.1 / 1°C or 1°F resolution • Refrigerating (dehumidifying) or heating (humidifying) control mode selection • Stand-by button on the front • Load start limitation and safety function in the event of breakage of the sensor • Quick setup through ZOT-LTR device • Connection to LAE supervisory systems TAB.

APPLICATIONS:

Temperature: Control of small cold stores, refrigerated cabinets and tables, heating systems, heated cupboards, bain-marie, ovens, laboratory equipment.

Humidity: Control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

LTR-5 Series

Functions	LTR-5T..	LTR-5C..	LTR-5A..
Input type	PTC	NTC10K	0÷1V
Range	-50÷150°C -60÷300°F	-40÷125°C -40÷260°F	0÷99.9% r.H.
Accuracy	±0.3°C ^(a) , ±1.0°C ^(c)	±0.3°C ^(b) , ±1°C ^(c)	±0.7% r.H.
Resolution	0.1/1°C; °F		0.1/1 % r.H.
Front protection	IP55		
Panel cut-out	71x29 mm		

(a) -50÷140°C; (b) -40÷110°C; (c) remaining range.

How to order examples:

LTR-5CSRE-A (NTC10K input, 1 relay, screw terminals, 230Vac supply, TTL port)
LTR-5ASRU (0÷1V input, 1 relay, screw terminals, 115Vac supply, no serial port)

On request, the LTR-5 is also available with gasket for a better protection between bezel and panel.

In order to know more options available for the models, please consult LAE or our local dealer.




LTR-5	T	S	R	E	-B
	1	2	3	4	5

POS.	FUNCTION	DESCRIPTION
1	Input	T* = PTC; C** = NTC10K; A = 0÷1V
2	Connectors	S = screw terminals; Q = male+female terminals
3	Output type	R = relay; F = SSR drive
4	Supply	D = 12Vac/dc; E = 230Vac; U = 115Vac, 2W
5	Serial comm.	- = no serial port; -A = TTL; -B = RS485

*The standard PTC probe is the ST1K20PI

**The standard NTC probe is the SN4K20PI

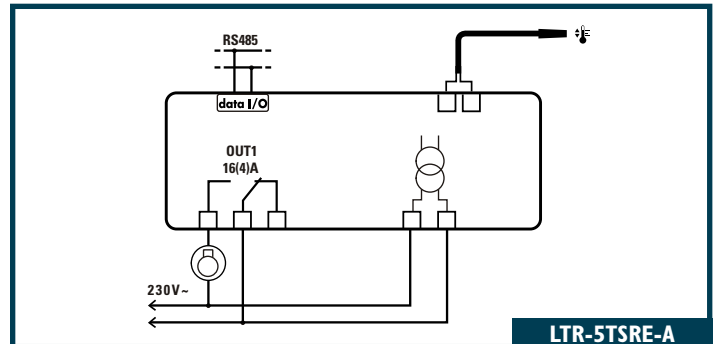

LTR-5TSRE-A

ACI-5

77x35x77 mm

TWO CHANNEL UNIVERSAL CONTROLLER, ON/OFF OR PID

Runs on mains power supply • PID with autotuning or ON/OFF control • Main output on 12A relay or for SSR-piloting and auxiliary output on 5A relay • Input for 0÷1V, 0/4÷20mA, PTC/NTC10K, TC J/K or Pt100 • 0.1 / 1°C or 1°F resolution • Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control • Absolute and relative temperature alarms • ON/OFF button on front • Load start limitation and safety operation in case of probe failure • Quick programming through ZOT-ACI key • Connection to LAE TAB supervisory systems

APPLICATIONS:

Temperature: Control of small cold stores, refrigerated cabinets and tables, heating systems, heated cupboards, bain-marie, ovens, laboratory equipment.

Humidity: Control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

ACI-5 Series

Functions	ACI-5T..	ACI-5P..	ACI-5J..	ACI-5A..	ACI-5I..
Input type	PTC	NTC10K	Pt100	TC "J" TC "K"	0÷1V 0/4÷20mA
Range	-50÷150°C -60÷300°F	-40÷125°C -40÷260°F	-100÷850°C -150÷999°F	-50÷750°C -60÷999°F	-50÷999°C -60÷999°F
Accuracy	±0.3°C	±0.3°C	±0.3°C ^(a) , ±1°C ^(b)	±3°C	±3mV ±0.2mA
Resolution	0.1 / 1°C / 1°F		1°C / °F		0.1/1

(a) -50÷150°C; (b) remaining range.

How to order:

ACI-5TS2RW-A (PTC/NTC10K input, screw terminals, 2 relays, 115÷230Vac supply voltage, TTL port)
ACI-5AS2MD-B (0÷1V input, screw terminals, output 1 on SSR drive, output 2 on relay, 12Vac/dc supply voltage, RS485 port)

On request, the ACI-5 is also available with gasket for a better protection between bezel and panel.


In order to know versions available, please consult LAE or our local dealer.



ACI-5	T	S	1	R	W	-B
	1	2	3	4	5	6

POS.	FUNCTION	DESCRIPTION
1	Input	A = 0÷1V; I = 0/4÷20mA; J = TC 'J' / 'K'; P = Pt100; T = PTC / NTC10K
2	Connections	S = built-in screw terminals
3	Output No.	1 = one; 2 = two
4	Output type	R = relay; M = Out1 on SSR, Out2 on relay
5	Supply	D* = 12Vac/dc; W = 115...230Vac 50/60Hz; 3 W
6	Serial comm.	Nil = no; -A = TTL; -B = RS485

* = in the version with 12Vac/dc power supply, the maximum voltage on the outputs is 50Vac/dc, in order to ensure safety insulations.

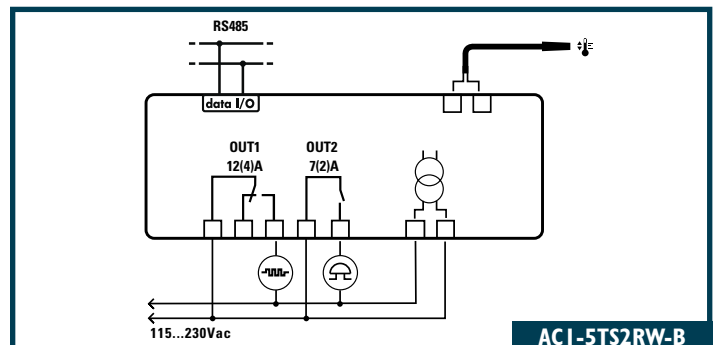

ACI-5TS2RW-B



71x97x61mm DIN RAIL

AC1-27

TWO CHANNEL UNIVERSAL CONTROLLER, ON/OFF OR PID

Runs on mains power supply ● PID with autotuning or ON/OFF control ● Main output on 12A relay or for SSR-piloting and auxiliary output on 5A relay ● Input for 0÷1V, 0/4÷20mA, PTC/NTC10K, TC J/K or Pt100 ● 0.1 / 1°C or 1°F resolution ● Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control ● Absolute or relative temperature alarms ● ON/OFF button on front ● Load start limitation and safety operation in case of probe failure ● Quick programming through ZOT-AC1 key v ● Connection to LAE TAB supervisory systems


AC1-27	T	S	1	R	E	-B
	1	2	3	4	5	6

POS.	FUNCTION	DESCRIPTION
1	Input	A = 0÷1V; I = 0/4÷20mA; J = TC 'J' / 'K'; P = Pt100; T = PTC/ NTC10K
2	Connections	S = built-in screw terminals
3	Output No.	1 = one; 2 = two
4	Output type	R = relay; M = Out1 on SSR, Out2 on relay
5	Supply	D = 12Vac/dc; E = 230Vac 50/60Hz; U = 115Vac 50/60Hz 3 W
6	Serial comm.	Nil = no; -A = TTL; -B = RS485

APPLICATIONS:

Temperature: on control panels for small cold stores, heating systems, heated cupboards, bains-marie, ovens, laboratory equipment.

Humidity: control panels for greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

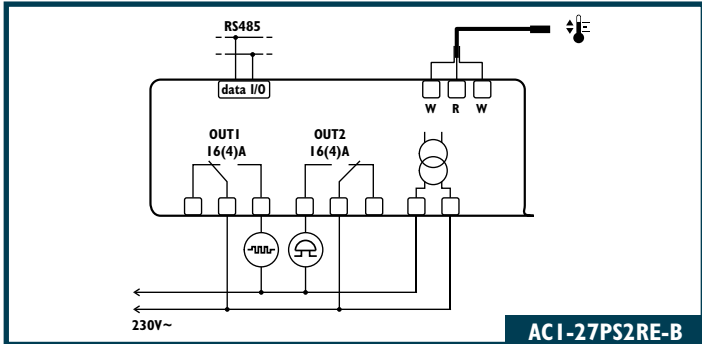

AC1-27PS2RE-B



110x53x75mm

AC1-2W

TWO CHANNEL UNIVERSAL CONTROLLER, ON/OFF OR PID

Wall-mount controller ● Runs on mains power supply ● PID with autotuning or ON/OFF control ● Main output on relay or for SSR-piloting and auxiliary output on relay ● Input for 0÷1V, 0/4÷20mA, PTC/NTC10K, TC J/K or Pt100 ● 0.1 / 1°C or 1°F resolution ● Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control ● Absolute or relative temperature alarms ● ON/OFF button on front ● Load start limitation and safety operation in case of probe failure ● Quick programming through ZOT-AC1 key ● Connection to LAE TAB supervisory systems


APPLICATIONS:

Temperature: control of small cold stores, heating systems, bains-marie, ovens, laboratory equipment.

Humidity: control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

AC1-2W	T	S	1	R	E	-B
	1	2	3	4	5	6

POS.	FUNCTION	DESCRIPTION
1	Input	A = 0÷1V; I = 0/4÷20mA; J = TC 'J' / 'K'; P = Pt100; T = PTC/ NTC10K
2	Connections	Q = detachable screw terminals
3	Output No.	1 = one; 2 = two
4	Output type	R = relay; M = Out1 on SSR, Out2 on relay
5	Supply	D = 12Vac/dc; E = 230Vac 50/60Hz; U = 115Vac 50/60Hz 3 W
6	Serial comm.	Nil = no; -A = TTL; -B = RS485

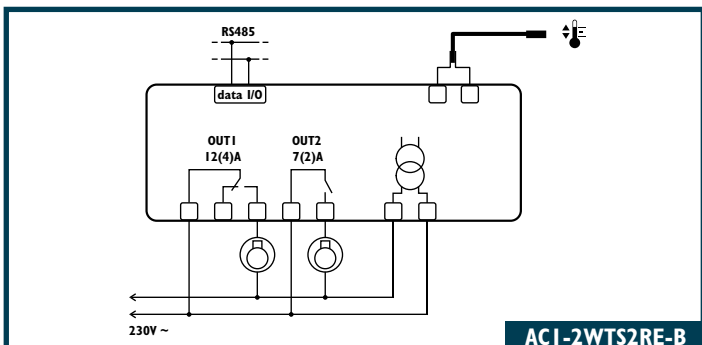

AC1-2WTS2RE-B

AC1-27 Series

Functions	AC1-27T..		AC1-27P..	AC1-27J..		AC1-27A..	AC1-27I..
Input type	PTC	NTC10K	Pt100	TC "J"	TC "K"	0÷1V	0/4÷20mA
Range	-50÷150°C -60÷300°F	-40÷125°C -40÷260°F	-100÷850°C -150÷999°F	-50÷750°C -60÷999°F	-50÷999°C -60÷999°F	Configurable in setup	
Accuracy	±0.3°C	±0.3°C	±0.3°C ^(a) ±1°C ^(b)	±3°C		±3mV	±0.2mA
Resolution	0.1 / 1 °C / 1 °F			1 °C / °F		0.1/1	

(a) -50÷150°C; (b) remaining range.

How to order:

AC1-27S1RE-B (TC J/K input, screw terminals, 1 relay output, 230Vac supply voltage, RS485 port).
AC1-27S2MD-A (0/4÷20mA input, screw terminals, output 1 on SSR drive, output 2 on relay, 12Vac/dc supply voltage, TTL port)

In order to know versions available, please consult LAE or our local dealer.

AC1-2W Series

Functions	AC1-2WT..		AC1-2WP..	AC1-2WJ..		AC1-2WA..	AC1-2WI..
Input type	PTC	NTC10K	Pt100	TC "J"	TC "K"	0÷1V	0/4÷20mA
Range	-50÷150°C -60÷300°F	-40÷125°C -40÷260°F	-100÷850°C -150÷999°F	-50÷750°C -60÷999°F	-50÷999°C -60÷999°F	Configurable in setup	
Accuracy	±0.3°C	±0.3°C	±0.3°C ^(a) ±1°C ^(b)	±3°C		±3mV	±0.2mA
Resolution	0.1 / 1 °C / 1 °F			1 °C / °F		0.1/1	

(a) -50÷150°C; (b) remaining range.

How to order:

AC1-2WPQ2RE-B (Pt100 input, detachable screw terminals, 2 relays, 230Vac supply voltage, RS485 port)
AC1-2WAQ2MD-A (0÷1V input, detachable screw terminals, output 1 on SSR drive, output 2 on relay, 12Vac/dc supply voltage, TTL port)

In order to know versions available, please consult LAE or our local dealer.

AT1-5

77x35x77 mm

UNIVERSAL DEFROST CONTROLLER FOR HIGH TEMPERATURE

Selectable Refrigerating or Heating control ● Runs on mains power supply ● Direct compressor control through high power 16(4)A, 16(5)A or 16(8)A relay ● Selectable NTC10K or PTC1000 ● Integrated defrost functions ● Auxiliary output configurable in four different operation modes ● Absolute or relative temperature alarms ● Door open alarm ● Automatic condenser maintenance warning ● On/Off button ● Optional light control button ● Quick programming through ZOT-AT1 key ● Connection to LAE supervisory systems

APPLICATIONS:

Freestanding upright cabinets and counters, cold stores, plug-in display cases, control panels, heated cabinets.

AT1-5 Series

Functions		AS1E-G	BS2E-BG	BS6E-AL
Inputs	thermostat	✓	✓	✓
	evaporator		✓	✓
	door switch		✓	✓
Outputs	thermostat 16(4)A	✓		
	thermostat 16(8)A			✓
	auxiliary 7(2)A		✓	✓
Power supply	230Vac	✓	✓	✓
Serial port	TTL			✓
Keypad	RS485		✓	
	generic with light button	✓	✓	✓

Models with removable screw terminal blocks are available. In this case, the letter "S" of code changes in "Q", ex. AT1-5BQ2E-BG.

All models come with an alarm buzzer. Versions with 110V power supply are available.


On request, the AT1-5 is also available with gasket for a better protection between bezel and metal panel.

In order to know more options available for the models, please consult LAE or our local dealer.



TECHNICAL DATA

Control Range:		-50÷120°C, -55÷240°F
Resolution:		0.1/1 °C; °F
Accuracy:	NTC10K:	<±0.3°C (-40.0÷70.0°C)
	PTC1000:	<±0.5°C (-50÷120°C)
Sensor type:		selectable NTC10K standard mod. SN4K20P1/P2 or PTC1000 standard mod. ST1K20P1/P2
Power supply:		230V~ ±10% 50÷60Hz 3W
Front protection:		IP55
Panel cut-out:		71x29 mm

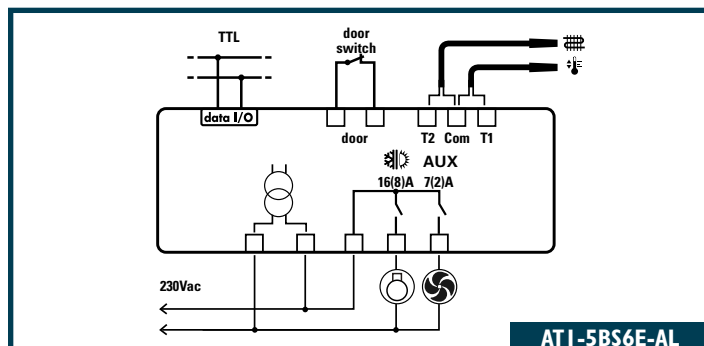

AT1-5BS6E-AL

AT2-5

77x35x77 mm

UNIVERSAL DEFROST CONTROLLER FOR HIGH AND LOW TEMPERATURE

Selectable Refrigerating or Heating control ● Runs on mains power supply ● Direct compressor control through high power 16(5)A ● Excellent evaporator fan control ● Auxiliary output configurable in six different operating modes ● Selectable NTC10K or PTC1000 ● Electrical, off cycle or hot gas defrost ● Absolute or relative temperature alarms ● Door open alarm ● Automatic condenser maintenance warning ● On/Off button ● Optional light control button ● Quick programming through ZOT-AT2 key

APPLICATIONS:

High or Low Temperature upright cabinets and counters, cold stores, plug-in display cases, control panels, heated cabinets.

AT2-5 Series

Functions		BS4E-G	BS4E-AG	BS4E-AL
Inputs	thermostat	✓	✓	✓
	evaporator	✓	✓	✓
	door switch	✓	✓	✓
Outputs	thermostat	✓	✓	✓
	evaporator fans	✓	✓	✓
	auxiliary	✓	✓	✓
Power supply	230Vac	✓	✓	✓
Serial port	serial port TTL		✓	✓
Keypad	generic	✓	✓	
	with light button			✓

Models with removable screw terminal blocks are available. In this case, the letter "S" of code changes in "Q", ex. AT2-5BQ4E-AL.

All models come with an alarm buzzer. Versions with 110V power supply are available.


On request, the AT2-5 is also available with gasket for a better protection between bezel and metal panel.

In order to know more options available for the models, please consult LAE or our local dealer.



TECHNICAL DATA

Control Range:		-50÷120°C, -55÷240°F
Resolution:		0.1/1 °C; °F
Accuracy:	NTC10K:	<±0.3°C (-40.0÷70.0°C)
	PTC1000:	<±0.5°C (-50÷120°C)
Sensor type:		selectable NTC10K standard mod. SN4K20P1/P2 or PTC1000 standard mod. ST1K20P1/P2
Power supply:		230V~ ±10% 50÷60Hz 3W
Front protection:		IP55
Panel cut-out:		71x29 mm

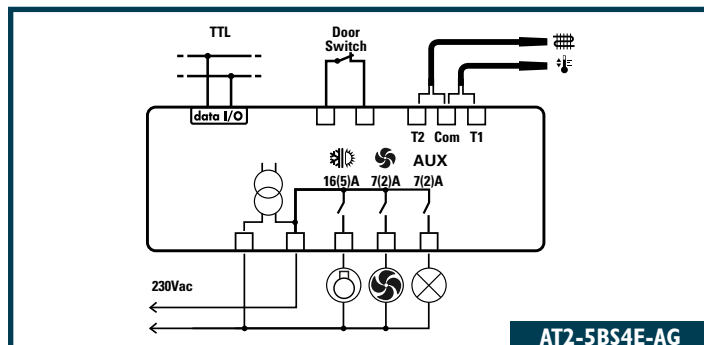

AT2-5BS4E-AG



77x35x90 MM

AD3-5

DEFROST CONTROLLER FOR DISPLAY CASES AND COLD STORES

Selectable Refrigerating or Heating control • Selectable NTC10K or PTC input • FLEXICOLD function for energy saving or alternative setpoint • Timed or optimised defrost control and remote start • Defrost timer backup in case of power failure • Direct compressor control through high power 12(5)A relay • Optional control of a second compressor or evaporator • Excellent evaporator fan control • Absolute or relative temperature alarms and door open alarm • Temperature and pressure monitoring and condensing unit maintenance • Light and standby control (On/Off) • Quick programming through ZOT-AD3 key • Connection to LAE supervisory systems

TECHNICAL DATA


Control Range:	-50÷120°C, -55÷240°F	
Resolution:	0.1 / 1 °C; °F	
Accuracy:	NTC10K:	<±0.3°C (-40.0÷70.0°C)
	PTC1000:	<±0.5°C (-50÷120°C)
Sensor type:	selectable NTC10K standard mod. SN4K20P11P2/P3 or PTC1000 standard mod. ST1K20P11P2/P3	
Power supply:	115÷230V~ ±10% 50÷60Hz 3W	
Front protection:	IP55	
Panel cut-out:	71x29 mm	

APPLICATIONS:

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables.

AD3-5 Series

Functions		C04D-AL	B13W-AG	C24W-BG
Temperature Inputs	thermostat	✓	✓	✓
	evaporator	✓	✓	✓
	auxiliary	✓	✓	✓
Door switch input	Voltage free contact	✓	✓	✓
Digital inputs	Voltage free contact	✓	✓	✓
	12÷24Vac voltage	✓	✓	✓
Outputs	thermostat	✓	✓	✓
	evaporator fans	✓	✓	✓
	defrost	✓	✓	✓
	auxiliary	✓	✓	✓
Power supply	115-230Vac	✓	✓	✓
	12Vac/dc	✓	✓	✓
Serial port	TTL serial port	✓	✓	✓
	RS485 serial port	✓	✓	✓
Keypad	generic	✓	✓	✓
	with light button	✓	✓	✓

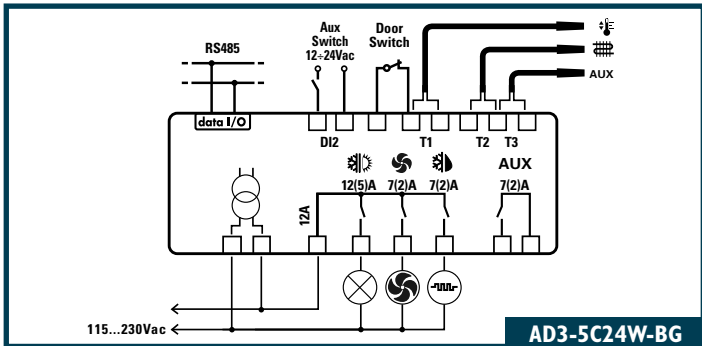

All models come with an alarm buzzer. All models are fitted with detachable screw terminals. On request, the AD3-5 is also available with gasket for a better protection between bezel and metal panel. In order to know more options available for the models, please consult LAE or our local dealer.



77x35x90 MM

AR1-5

DEFROST CONTROLLER WITH RTC FOR DISPLAY CASES AND COLD STORES

Up to 6 scheduled real time defrosts and remote start • Selectable Refrigerating or Heating control • Selectable NTC10K or PTC input • FLEXICOLD function for energy saving or alternative setpoint • Direct compressor control through high power 12(5)A relay • Optional control of a second compressor or evaporator • Excellent evaporator fan control • Absolute or relative temperature alarms and door open alarm • Temperature and pressure monitoring and condensing unit maintenance • Light and standby control (On/Off) • Quick programming through ZOT-ARI • Connection to LAE supervisory systems

TECHNICAL DATA


Control Range:	-50÷120°C, -55÷240°F	
Resolution:	0.1 / 1 °C; °F	
Accuracy:	NTC10K:	<±0.3°C (-40.0÷70.0°C)
	PTC1000:	<±0.5°C (-50÷120°C)
Sensor type:	selectable NTC10K standard mod. SN4K20P11P2/P3 or PTC1000 standard mod. ST1K20P11P2/P3	
Power supply:	115÷230V~ ±10% 50÷60Hz 3W	
Rechargeable battery:	>150 hours	
Front protection:	IP55	
Panel cut-out:	71x29 mm	

APPLICATIONS:

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables and all those plants where real time defrost starts are needed.

AR1-5 Series

Functions		C04D-AL	B13W-AG	C24W-BG
Temperature Inputs	Thermostat	✓	✓	✓
	Evaporator	✓	✓	✓
	Auxiliary	✓	✓	✓
Door switch input	Voltage free contact	✓	✓	✓
Digital inputs	Voltage free contact	✓	✓	✓
	12÷24Vac voltage	✓	✓	✓
Outputs	Thermostat	✓	✓	✓
	Evaporator fans	✓	✓	✓
	Defrost	✓	✓	✓
	Auxiliary	✓	✓	✓
Power supply	115-230Vac	✓	✓	✓
	12Vac/dc	✓	✓	✓
Serial port	Serial port TTL	✓	✓	✓
	Serial port RS485	✓	✓	✓
Keypad	Generic	✓	✓	✓
	With light button	✓	✓	✓

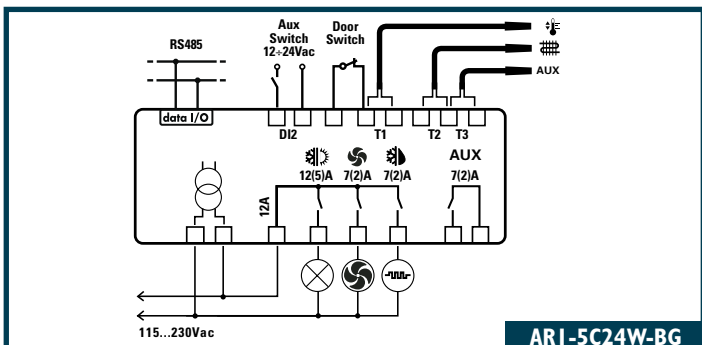

All models come with an alarm buzzer; All models are fitted with detachable screw terminals. On request, the AR1-5 is also available with gasket for a better protection between bezel and metal panel. In order to know more options available for the models, please consult LAE or our local dealer.

AR2-27

71x97x61 MM DIN RAIL

UNIVERSAL DEFROST CONTROLLER WITH RTC

Selectable Refrigerating or Heating control ● Selectable NTC10K or PTC input ● FLEXICOLD function for energy saving or alternative setpoint ● Cyclic defrosts or scheduled real time starts ● Synchronized defrost start and termination with master-slave connection ● Optional control of a second compressor or evaporator ● Excellent evaporator fan control ● Absolute or relative temperature alarms and door open alarm ● Temperature and pressure monitoring and condensing unit maintenance ● Light and standby control (On/Off) ● Quick programming through ZOT-AR2 ● Connection to LAE supervisory systems

APPLICATIONS:

On control panels for cold stores, plug-in and supermarket display cases.

AR2-27 Series

Functions	B13E-AG	C24E-AG	C35E-BG
Temperature Inputs			
Thermostat	✓	✓	✓
Evaporator	✓	✓	✓
Auxiliary	✓	✓	✓
Door switch input			
Voltage free contact	✓	✓	✓
Digital inputs			
Voltage free contact	✓		
12÷24Vac voltage		✓	
Defrost synchronisation			✓
Outputs			
Thermostat	✓	✓	✓
Evaporator fans	✓	✓	✓
Defrost	✓	✓	✓
Auxiliary 1	✓	✓	✓
Auxiliary 2	✓	✓	✓
Power supply			
230Vac	✓	✓	✓
Serial port			
Serial port TTL	✓	✓	✓
Serial port RS485			✓
Keypad			
Generic	✓	✓	✓

All models come with an alarm buzzer.


Versions with power supply 12Vac/dc and 115Vac are also available.

In order to know more options available for the models, please consult LAE or our local dealer.



TECHNICAL DATA

Control Range:	-50÷120°C, -55...240°F
Resolution:	0.1 / 1 °C; °F
Accuracy:	NTC10K: $\leq \pm 0.3^\circ\text{C}$ (-40.0÷70.0°C) PTC1000: $\leq \pm 0.5^\circ\text{C}$ (-50÷120°C)
Sensor type:	selectable NTC10K standard mod. SN4K20P1/P2/P3 or PTC1000 standard mod. ST1K20P1/P2/P3
Power supply:	230Vac ±10% 50÷60Hz 3W
Rechargeable battery:	>150 hours
Front protection:	IP55

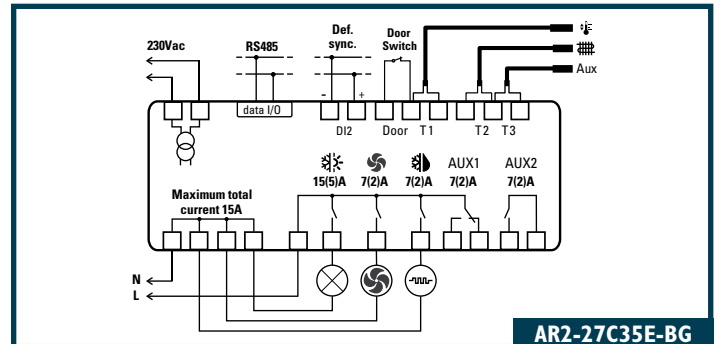

AR2-27C35E-BG

AD-32

169x38x78 MM

UNIVERSAL POWERFUL DEFROST CONTROLLER

Selectable Refrigerating or Heating control ● Selectable NTC10K or PTC input ● FLEXICOLD function for energy saving or alternative setpoint ● Timed or optimised defrost control ● Synchronized defrost start and termination with master-slave connection ● Optional control of a second compressor or evaporator ● Excellent evaporator fan control ● Absolute or relative temperature alarms and door open alarm ● Temperature and pressure monitoring and condensing unit maintenance ● Light and standby control (On/Off) ● Quick programming through ZOT-AD key ● Connection to LAE supervisory systems

APPLICATIONS:

Plug-in cabinets, supermarket display cases, cold stores, upright fridges and freezers, refrigerated tables.

AD-32 Series

Functions	Q13W-AG	S24W-AG	S35W-BG
Temperature Inputs			
Thermostat	✓	✓	✓
Evaporator	✓	✓	✓
Auxiliary	✓	✓	✓
Digital inputs			
Voltage free contact	✓	✓	✓
Digital inputs			
Voltage free contact	✓	✓	✓
12÷24Vac voltage		✓	
Defrost synchronisation			✓
Outputs			
Thermostat 15(5)A	✓	✓	✓
Evaporator fans	✓	✓	✓
Defrost	✓	✓	✓
Auxiliary 1	✓	✓	✓
Auxiliary 2	✓	✓	✓
Connections			
Screw terminals	✓	✓	✓
M/F terminals + fastons	✓	✓	✓
Power supply			
115÷230Vac	✓	✓	✓
Serial port			
Serial port TTL	✓	✓	✓
Serial port RS485			✓

All models come with an alarm buzzer.


On request, the AD-32 is also available with 7...30Vdc power supply.

In order to know more options available for the models, please consult LAE or our local dealer.



TECHNICAL DATA

Control Range:	-50÷120°C, -55÷240°F
Resolution:	0.1 / 1 °C; °F
Accuracy:	NTC10K: $\leq \pm 0.3^\circ\text{C}$ (-40.0÷70.0°C) PTC1000: $\leq \pm 0.5^\circ\text{C}$ (-50÷120°C)
Sensor type:	selectable NTC10K standard mod. SN4K20P1/P2/P3 or PTC1000 standard mod. ST1K20P1/P2/P3
Power supply:	115÷230V~ ±10% 50÷60Hz 3W
Front protection:	IP55
Panel cut-out:	163x31.5 mm

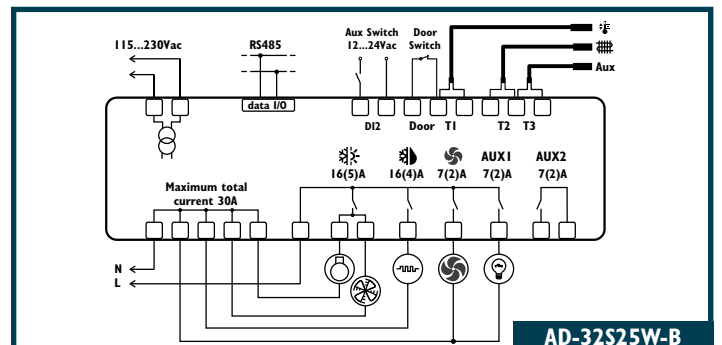

AD-32S25W-B



77x35x90 MM

AH1-5

DEFROST CONTROLLER FOR REFRIGERATED TRANSPORTS


Selectable Heating/Refrigerating control with Neutral Band • Selectable NTC10K or PTC input • Defrost timer backup in case of power failure • Direct compressor control through high power relay • Optional control of a second compressor or evaporator • Excellent evaporator fan control • Absolute or relative temperature alarms and door open alarm • Temperature and pressure monitoring and condensing unit maintenance • Light and standby control (On/Off) • Quick programming through ZOT-AH1 key • Connection to LAE supervisory systems

APPLICATIONS:

refrigerated transports, HT and LT cold storage rooms, plug-in cabinets, display cases, open counters.

TECHNICAL DATA

Control Range:		-50÷120°C, -55÷240°F
Resolution:		0.1 / 1 °C; °F
Accuracy:	NTC10K:	<±0.3°C (-40.0÷70.0°C)
	PTC1000:	<±0.5°C (-50÷120°C)
Sensor type:		selectable NTC10K standard mod. SN4K20P1/P2/P3 or PTC1000 standard mod. ST1K20P1/P2/P3
Power supply:		115-230V~ ±10% 50=60Hz 3W
Front protection:		IP55
Panel cut-out:		71x29 mm

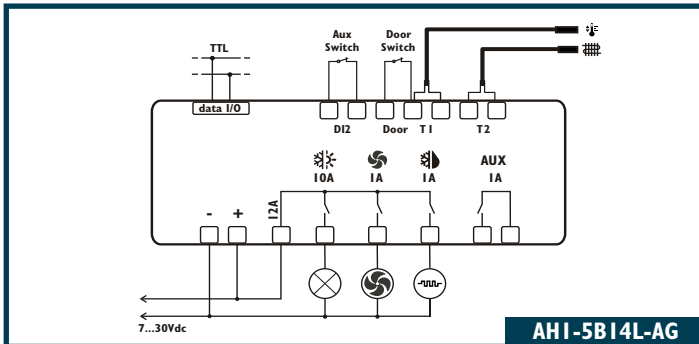

AH1-5BI14L-AG

AH1-5 series

Functions		B14L-AG	B13W-AG	C24W-BL
Temperature inputs	Thermostat	✓	✓	✓
	Evaporator	✓	✓	✓
	Auxiliary			✓
Door switch input	Voltage free contact	✓	✓	✓
	Digital input DI2	✓	✓	
Outputs	Voltage free contact	✓	✓	
	Voltage 12-24Vac			✓
	Thermostat	✓	✓	✓
Power supply	Evaporator fans	✓	✓	✓
	Defrost	✓	✓	✓
	Auxiliary	✓		✓
	115-230Vac		✓	✓
Serial port	7-30Vdc	✓		
	TTL	✓	✓	
Keypad	RS485			✓
	Generic	✓	✓	
	With light button			✓

All models come with an alarm buzzer. All models are fitted with detachable screw terminals. On request, the AH1-5 is also available with gasket for a better protection between bezel and metal panel. In order to know more options available for the models, please consult LAE or our local dealer.



110x53x75 MM

AT2-2W

UNIVERSAL DEFROST CONTROLLER FOR HIGH AND LOW TEMPERATURE


Wall-mount controller • Selectable Refrigerating or Heating control • Runs on mains power supply • Direct compressor control through high power relay • Excellent evaporator fan control • Auxiliary output configurable in six different operating modes • Selectable NTC10K or PTC input • Electrical, off cycle or hot gas defrost • Absolute or relative temperature alarms • Door open alarm • Automatic condenser maintenance warning • On/Off button • Optional light control button • Quick programming through ZOT-AT2 key

APPLICATIONS:

High or Low Temperature cold stores.

TECHNICAL DATA

Control Range:		-50÷120°C, -55÷240°F
Resolution:		0.1 / 1 °C; °F
Accuracy:	NTC10K:	<±0.3°C (-40.0÷70.0°C)
	PTC1000:	<±0.5°C (-50÷120°C)
Sensor type:		selectable NTC10K standard mod. SN4K20P1/P2 or PTC1000 standard mod. ST1K20P1/P2
Power supply:		230V~ ±10% 50=60Hz 3W
Front protection:		IP55

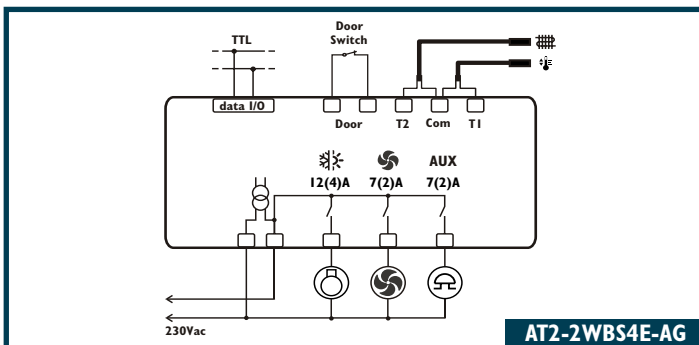

AT2-2WBS4E-AG

AT2-2W Series

Functions		BQ4E-G	BQ4E-AG	BQ4E-AL
Inputs	thermostat	✓	✓	✓
	evaporator	✓	✓	✓
	door switch	✓	✓	✓
Outputs	thermostat	✓	✓	✓
	evaporator fans	✓	✓	✓
	auxiliary	✓	✓	✓
Power supply	230Vac	✓	✓	✓
Serial port	serial port TTL		✓	✓
Keypad	generic	✓	✓	
	with light button			✓

All models come with detachable screw terminals and alarm buzzer. Versions with 115V power supply are available. In order to know more options available for the models, please consult LAE or our local dealer.

AD2-28

107x95x47 MM DIN RAIL

VERSATILE SPLIT DEFROST CONTROLLER

Cyclic defrosts ● Synchronized defrost start and termination with master-slave connection ● Selectable NTC10K or PTC input ● FLEXICOLD function for energy saving or alternative setpoint ● Optional control of a second compressor or evaporator ● Excellent evaporator fan control ● Absolute or relative temperature alarms, door open alarm, condenser high temperature/pressure alarm ● Light and standby control (On/Off) ● Quick programming through ZOT-AD2 ● Connection to LAE supervisory systems ● Available display unit: LCD-5S or RU33

APPLICATIONS:

Upright refrigerators, plug-in and supermarket display cases, cold stores, control panels.

AD2-28 series

Functions	B1S3E-A	C2Q4E-A	C3R5U-B
Temperature inputs			
Thermostat	✓	✓	✓
Evaporator	✓	✓	✓
Auxiliary	✓	✓	✓
Door switch input			
Voltage free contact	✓	✓	✓
DI2 aux. digital input			
Voltage 12÷24Vac	✓	✓	✓
Defrost synchronisation			✓
Connections			
Quick with M/F connectors		✓	✓
Screw terminals			✓
Display unit			
LCD-5S	✓	✓	✓
RU33			✓
Outputs			
Thermostat	✓	✓	✓
Evaporator fans	✓	✓	✓
Defrost	✓	✓	✓
Auxiliary 1	✓	✓	✓
Auxiliary 2	✓	✓	✓
Power supply			
230Vac	✓	✓	✓
115Vac			✓
Serial port			
TTL	✓	✓	✓
RS485			✓

All models come with an alarm buzzer. Versions with power supply 12Vac are also available.

In order to know more options available for the models, please consult LAE or our local dealer.

AR2-28

107x95x47 MM

VERSATILE SPLIT DEFROST CONTROLLER WITH RTC

Up to 6 real time defrosts ● Synchronized defrost start and termination with master-slave connection ● Selectable NTC10K or PTC input ● FLEXICOLD function for energy saving or alternative setpoint ● Optional control of a second compressor or evaporator ● Excellent evaporator fan control ● Absolute or relative temperature alarms, door open alarm, condenser high temperature/pressure alarm ● Light and standby control (On/Off) ● Quick programming through ZOT-AR2 ● Connection to LAE supervisory systems ● Available display unit: LCD-5S or RU33

APPLICATIONS

Cold stores, control panels, upright refrigerators, plug-in and supermarket display cases, and all those plants where real time defrost starts are needed.

AR2-28 series

Functions	B1S3E-B	C2Q4E-B	C3R5U-A
Temperature inputs			
Thermostat	✓	✓	✓
Evaporator	✓	✓	✓
Auxiliary	✓	✓	✓
Door switch input			
Voltage free contact	✓	✓	✓
DI2 aux. digital input			
12÷24Vac voltage	✓	✓	✓
Defrost synchronisation			✓
Connections			
Quick with M/F connectors		✓	✓
Screw terminals			✓
Display unit			
LCD-5S	✓	✓	✓
RU33			✓
Outputs			
Thermostat	✓	✓	✓
Evaporator fans	✓	✓	✓
Defrost	✓	✓	✓
Auxiliary 1	✓	✓	✓
Auxiliary 2	✓	✓	✓
Power supply			
230Vac	✓	✓	✓
115Vac			✓
Serial port			
TTL	✓	✓	✓
RS485			✓

All models come with an alarm buzzer. Versions with power supply 12Vac are also available.

In order to know more options available for the models, please consult LAE or our local dealer.




TECHNICAL DATA: LCD-5S DISPLAY UNIT

Dimensions : 77x35x20 mm (WxHxD) Panel cut-out: 71x29mm
Front protection: IP55

TECHNICAL DATA

Range: -50÷120°C, -55...240°F
Resolution: 0.1/1 °C; °F
Precision: NTC10K: $\leq \pm 0.3^\circ\text{C}$ (-40.0÷70.0°C)
PTC1000: $\leq \pm 0.5^\circ\text{C}$ (-50÷120°C)
Sensor type: selectable NTC10K standard mod. SN4K20P1/P2/P3
o PTC1000 mod. standard ST1K20P1/P2/P3
Power supply: 230Vac ±10% 50÷60Hz 3W

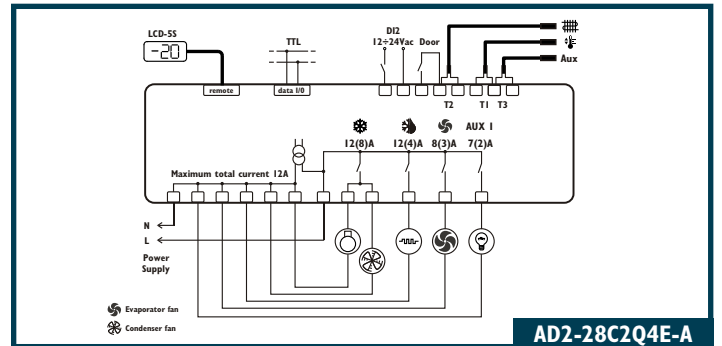

AD2-28C2Q4E-A




TECHNICAL DATA: RU33 DISPLAY UNIT

Dimensions: 169x38x25 mm (WxHxD) Panel cut-out: 163x31.5 mm
Front protection: IP55

TECHNICAL DATA

Range: -50...120°C, -55...240°F
Resolution: 0.1/1 °C; °F
Precision: NTC10K: $\leq \pm 0.3^\circ\text{C}$ (-40.0÷70.0°C)
PTC1000: $\leq \pm 0.5^\circ\text{C}$ (-50÷120°C)
Sensor type: selectable NTC10K standard mod. SN4K20P1/P2/P3
or PTC1000 standard mod. ST1K20P1/P2/P3
Rechargeable battery: >150 hours
Power supply: 230V~ ±10% 50÷60Hz 3W

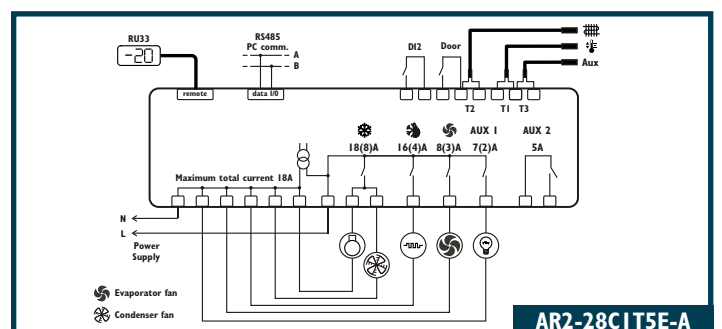

AR2-28C1T5E-A



71x97x61 mm DIN RAIL

MS-27

MULTI-COMPRESSOR OR MULTI-FAN CONTROLLER

Four (MS27) or eight (MS27+ME27) ON/OFF outputs for the control of single or multi-stage compressors or fans. ● Proportional output for speed control (inverters). ● Output with change-over contacts for alarm control. ● Option of connection to an expansion module (ME27). ● Input for pressure transmitter (0/4...20mA) or for a temperature probe (NTC10K). ● Two digital inputs on voltage free contact for programmable function, up to eight digital optocoupled voltage inputs for a complete system diagnostics. ● Selection of the control algorithm: rotation of outputs, sequential activation, optimisation of the available power. ● Pressure – Temperature conversion according to gas used. ● Storage of the latest nine alarms ● Automatic maintenance management. ● 115Vac or 230Vac power supply by means of built-in transformer. ● Connections on screw terminals. ● DIN-Rail mount. ● Connection to supervisory PC.

MS27: TECHNICAL DATA

Pressure input	type:	0/4...20mA
	range:	-1.0...45.0bar
	resolution:	0.1bar
	accuracy:	±0.2bar
Temperature input	type:	NTC10K (LAE SN4...)
	range:	-50.0...120.0°C
	resolution:	0.5°C
	accuracy:	±0.5°C
Power supply	MS27...E	230Vac±10%, 50/60Hz, 3W
	MS27...U	115Vac±10%, 50/60Hz, 3W
Relay outputs	OUT1...OUT4	5(1)A
	Alarm	7(2)A
Front protection		IP55

APPLICATIONS:


For cryogenerators in supermarkets, cold stores and all cryogenic systems with variable demand.

How to order: MS27 controller, ME27 expansion module, PGT35 transmitter.


MS27 series

	Functions	-1QE-B	-1SE-A	-1SU-B
Connections	Screw terminals		✓	✓
	Quick on M/F terminals	✓		
Power supply	230Vac	✓	✓	
	115Vac			✓
Serial port	TTL		✓	
	RS485	✓		✓

In order to know more options available for the models, please consult LAE or our local dealer.

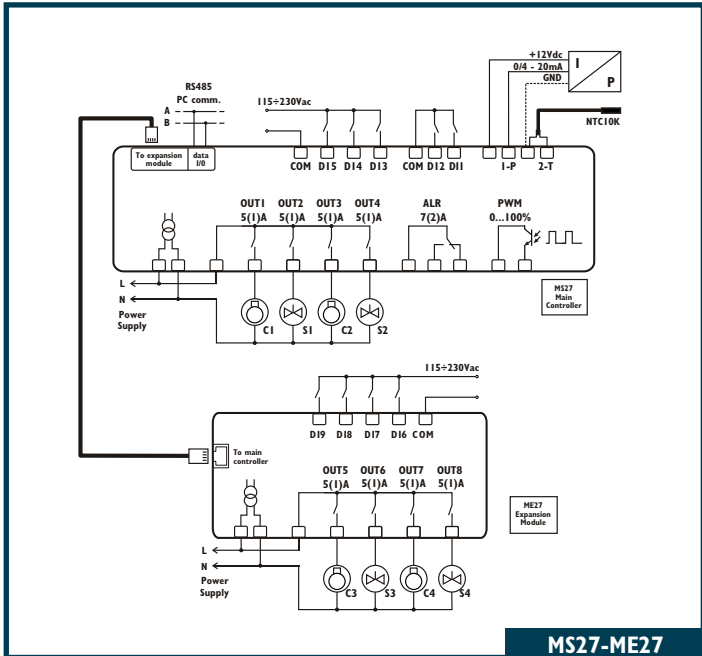

MS27-ME27

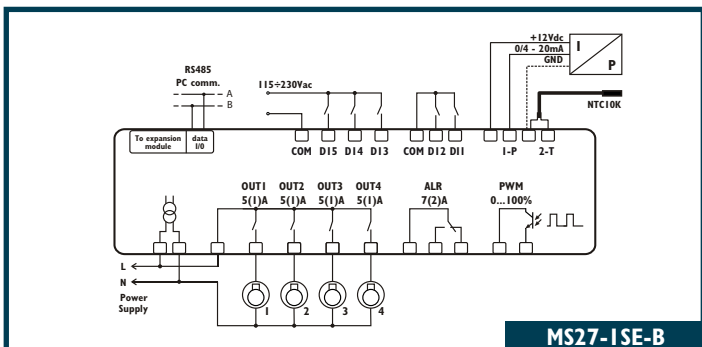


MS27-1SE-B



ME-27

ME27: TECHNICAL DATA

Power supply	ME27...E	230Vac±10%, 50/60Hz, 3W
	ME27...U	115Vac±10%, 50/60Hz, 3W
Digital inputs	D16...D19	115...230Vac
Relay outputs	OUT5...OUT8	5(1)A
Front protection		IP55

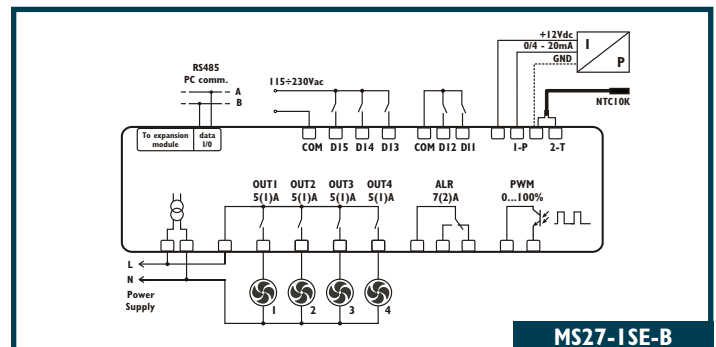

MS27-1SE-B

MTR6

64x32x81 mm

SINGLE OUTPUT THERMOSTAT

Panel controller with programmable differential ● Refrigerating or heating mode control selection ● Load start limitation ● Safety function in the event of breakage of the sensor ● Very compact size

APPLICATIONS:


Control of small cold stores, refrigerated cabinets and tables, heating systems, heated cupboards, bains-marie and ovens.



TECHNICAL DATA

Range:	50÷150°C
Resolution:	1°
Accuracy:	±0.7° (-30÷110°C)
Sensor type:	PTC; standard mod. ST1K20P1
Power supply:	12Vac/dc ±10%; 2W
Panel cut-out:	58x26 mm

Standard Versions	Front protection
MTR6T1RD	IP40
MTR6T1RDS	IP54

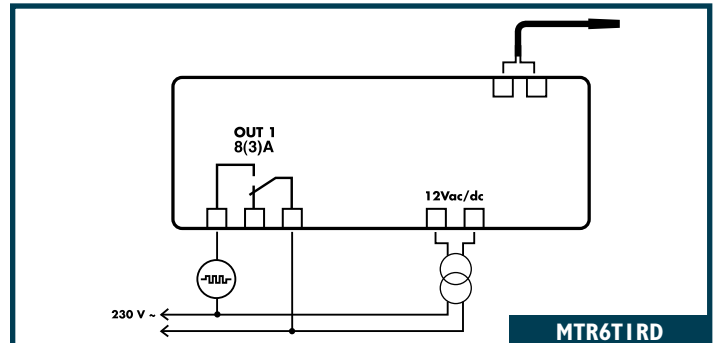

LLC1SE

LIQUID LEVEL CONTROLLER

Electrically detects the level of condensate in the drip tray of the refrigerator and activates the evaporation heaters.


APPLICATIONS:

This device completes the instruments that LAE provides for the control of professional refrigerators. For the evaporation of the water in the drip tray of the refrigerator.



TECHNICAL DATA

Dimensions:	91.5x54x55 DIN RAIL
Power supply:	230V ±10% 50/60 Hz
Consumption:	3W
Maximum load:	150W (resistive)
Timed operation:	3 minutes
Connections:	Screw terminals 2.5mm ²
Protection:	IP00

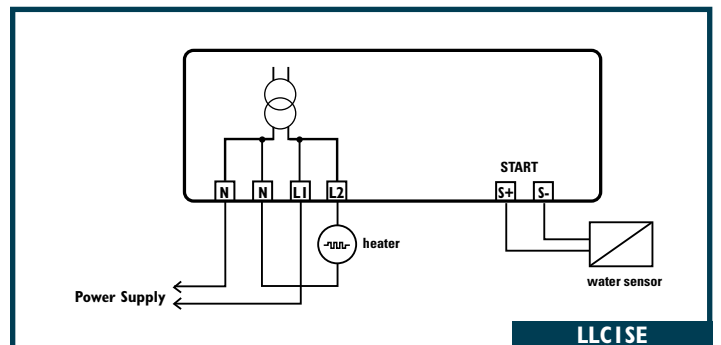



77x35x77 MM

LT12


WIDE RANGE THERMOMETER OR HYGROMETER

Panel display unit with range between -100 and $+900^{\circ}$ ● It's available in the version with $^{\circ}\text{C}$ or $^{\circ}\text{F}$ ● 0.1° or 1° resolution ● Input for PTC/Pt100/TC/0÷1V ● Runs on mains power supply.

APPLICATIONS:

Temperature: accurate measurements in cold stores, refrigerating cabinets and tables, greenhouses, seasoning cells, high temperature ovens or furnaces.

Humidity: accurate measurements in greenhouses, seasoning cells, air-conditioned rooms.

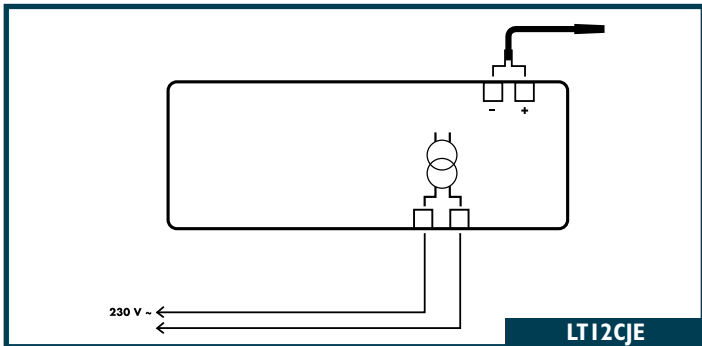

LT12 Series : $^{\circ}\text{C}$ and %RH

Functions	CT D/I/E	CP D/I/E	CJ D/I/E	CK D/I/E	CA D/I/E
Input type	PTC*	Pt100	TC "J"	TC "K"	0÷1V
Range	$-50\div150^{\circ}\text{C}$	$-100\div600^{\circ}\text{C}$	$-50\div700^{\circ}\text{C}$	$-50\div900^{\circ}\text{C}$	$0\div100\%$ rH
Accuracy	S1**= $\pm 0.2^{\circ}\text{C}$; S2**= $\pm 1^{\circ}\text{C}$		$\pm 3^{\circ}\text{C}$		$\pm 0.1\%$
Resolution	S1**= 0.1°C ; S2**= 1°C		1°C		0.1%
Supply	..D= $12\text{Vac}/\text{dc}$; 2W /..I= $24\text{Vac}/\text{dc}$; 3W /..E= $230\text{Vac} \pm 10\%$; 50/60 Hz; 2W				
Protection	IP54				
Panel cut-out	71x29 mm				

* Standard PTC probe is ST1K20P1

**Scale: S1 = $-19.9\div 99.9^{\circ}\text{C}$; S2 = remaining

Models with $^{\circ}\text{F}$ scale are also available.

In order to know versions available, please consult LAE or our local dealer.



77x35x77 MM

LTS12


CONFIGURABLE THERMOMETER OR HYGROMETER

Panel display unit ● Indicates the instant temperature or humidity and the min./max. measured values ● Easy selection of scale in $^{\circ}\text{C}/^{\circ}\text{F}$, of fixed or automatic resolution, input for PTC/Pt100, TC/J, 0...1V ● Runs on mains power supply

APPLICATIONS:

Temperature: measurements in cold stores, high temperature ovens or furnaces, washing machines and plants in which the thermometer requires configuration on the spot.

Humidity: measurements in greenhouses, seasoning cells, cold stores, air-conditioned rooms and plants in which the hygrometer requires configuration on the spot.

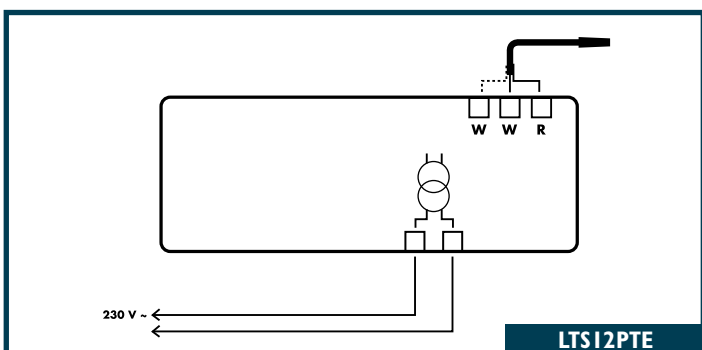

LTS12 Series

Functions	PT D/I/E	TC D/I/E	AV D/I/E
Input type	PTC*	Pt100	TC "J" TC "K"
Range	$-50\div150^{\circ}\text{C}$ $-60\div300^{\circ}\text{F}$	$-100\div600^{\circ}\text{C}$ $-150\div999^{\circ}\text{F}$	$-50\div700^{\circ}\text{C}$ $-60\div999^{\circ}\text{F}$ $-50\div900^{\circ}\text{C}$ $-60\div999^{\circ}\text{F}$
Accuracy	S1**= $\pm 0.2^{\circ}\text{C}$; S2**= $\pm 1^{\circ}\text{C}$ S1**= $\pm 0.4^{\circ}\text{F}$; S2**= $\pm 2^{\circ}\text{F}$		$\pm 3^{\circ}\text{C}$ $\pm 5^{\circ}\text{F}$ $\pm 0.1\%$
Resolution	S1**= 0.1°C ; S2**= 1°C 1°F		1°C 1°F 0.1%
Supply	..D= $12\text{Vac}/\text{dc} \pm 10\%$; 2W /..I= $24\text{Vac}/\text{dc} \pm 10\%$; 3W /..E= $230\text{Vac} \pm 10\%$; 50/60 Hz; 2W		
Protection	IP54		
Panel cut-out	71x29 mm		

*Standard PTC probe is ST1N20P.

**Scale: S1 = $-19.9\div 99.9^{\circ}\text{C}$ / $0\div 212^{\circ}\text{F}$; S2 = remaining

In order to know versions available, please consult LAE or our local dealer.

TMR15

77x35x77 mm

COUNTDOWN TIMER

Panel timer ● Countdown in hours and minutes or minutes and seconds ● Manual start/stop of countdown ● Remote start of countdown ● Manual switching on/off of output ● Mains powered ● Buzzer to warn countdown end ● Keypad lock option.

APPLICATIONS:

Control of duration of industrial processes, control of dough retarders, control of cooking time in ovens.


Standard versions	Power supply	Buzzer
TMR15E	230Vac ±10%, 3W	
TMR15E-A	230Vac ±10%, 3W	✓
TMR15D-A	12Vac/dc ±10%, 3W	✓

Versions with 110V supply are also available.



TECHNICAL DATA

Outputs:	Out 1 6(4)A 240V~
Power supply:	230Vac ±10% 3W
Front protection:	IP55
Panel cut-out:	71x29 mm

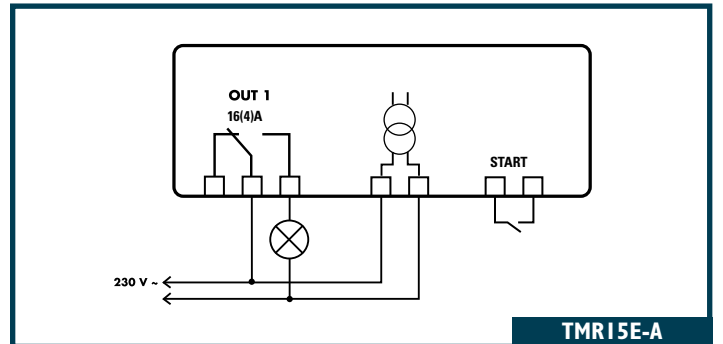

TMR15E-A

TIMER12

77x35x77 mm

COUNTDOWN TIMER

Panel timer or clock ● Countdown in hours and minutes or minutes and seconds ● Manual start/stop of countdown ● Manual switching on/off of output

APPLICATIONS:


Control of duration of industrial processes, control of dough retarders, control of cooking time in ovens.

Standard version	Functions
TIMER12D/1	Countdown in hours and minutes
TIMER12D/2	Countdown in minutes and seconds
TIMER12D/3	Standby then countdown in hours and minutes
TIMER12D/4	Clock with six programmable switching on periods



TECHNICAL DATA

Range:	99:59 hours:minutes ; minutes:seconds
Output:	5(3)A 240Vac
Power supply:	12Vac/dc ±10% 2W
Front protection:	IP54
Panel cut-out:	71x29 mm

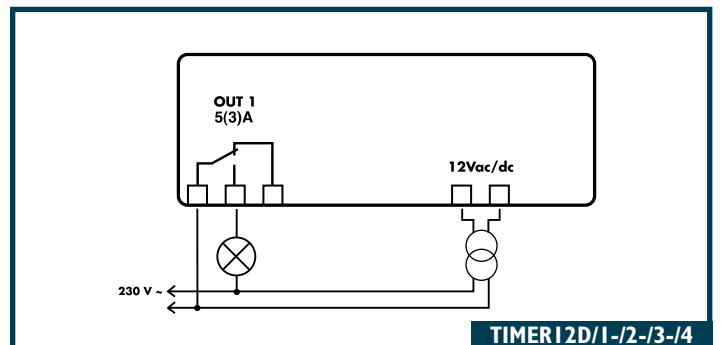


TIMER12D/1-/2-/3-/4

TAB4.2

MONITORING, LOGGING AND PROGRAMMING SOFTWARE

Overall plant monitoring • Compatible with the wireless communication system • Storage of temperature, humidity, pressure, alarms • Display and printing in numerical and graphic form of stored data • Export of stored data for Excel* or others • Diagnostics with dynamic graphs of all analog inputs • Virtual instrument for analysing the system and setting regulator parameters • Automatic sending or on demand of SMS to trace alarm status • Connection to remote PC for tele-servicing via Internet • Several languages available: English, German, Italian, Spanish, Polish etc.

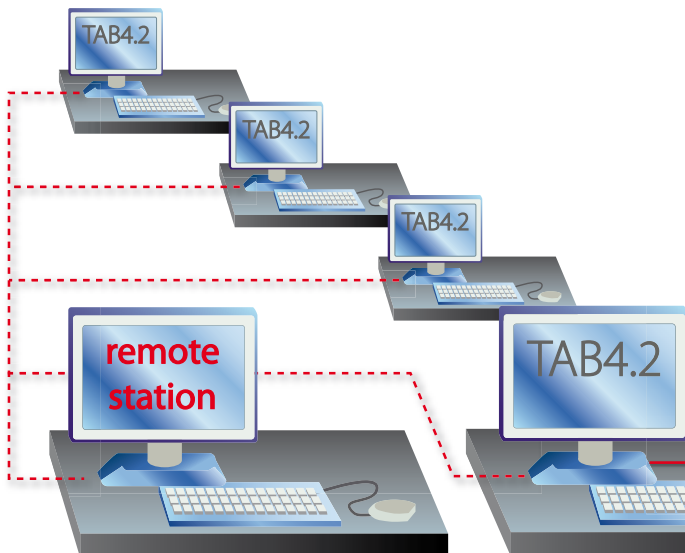


AVAILABLE OPTIONS

Available as full optional as described above but also in a "low cost version" for data logging only. This version is called TAB4.2LV

APPLICATIONS

Supervision of the refrigeration process in supermarkets, convenience stores, shops, petrol stations, large kitchens, food factories, cruise ships etc.

- Computer with Windows 2000/XP/Vista* operating system installed and properly running, minimum processor and memory as required from Windows* version – USB port – Mouse – CD-ROM drive
- 1024x768 pixel screen resolution, 16-bit colour
- 1GB available on Hard Disk
- RS232 serial port (COM); an additional port is required if a GSM modem is fitted
- In case of wireless communication with the controllers, modules SWB-C and SWB-R are needed. Alternatively, an RS232-RS485 converter mod. SBC485 has to be fitted in case of a hard-wired system.
- GSM modem for sending SMS

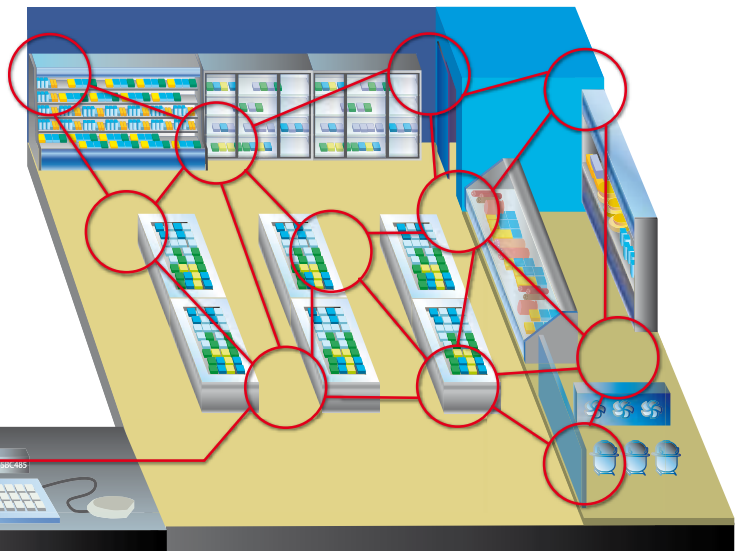

WIRELESS PLANT MONITORING



THE LAE ELECTRONIC WIRELESS COMMUNICATION SYSTEM, COMBINED WITH THE TAB SUPERVISORY SOFTWARE, ALLOWS EQUIPMENT RUN BY LAE CONTROLLERS TO BE MONITORED EASILY WITHOUT THE NEED OF A HARD-WIRED CABLE. THIS SYSTEM WILL BE PARTICULARLY USEFUL IN SUPERMARKETS AND KITCHENS WHERE THE LAYING OF WIRES IS COSTLY AND DIFFICULT, BOTH FOR NEW AND EXISTING UNITS.

THE SWB MODULES DEVELOPED BY LAE ELECTRONICS, ALLOW ALL THE LAE CONTROLLERS FITTED WITH A TTL OR RS485 PORT TO BE INCORPORATED INTO SUCH A SYSTEM.

THE PLANT SUPERVISORY PC, RUNNING THE TAB SOFTWARE, IS CONNECTED VIA AN SWB-C VERSION OF THE MODULE ALLOWING COMMUNICATION TO ALL CONTROLLERS WITHIN THE WIRELESS NETWORK

THE CONTROLLERS USE THE SWB-R MODULE VERSION, SO THAT ONCE CONNECTED THEY WILL AUTOMATICALLY BECOME PART OF THE NETWORK.

EASY-TO-INSTALL AND POWERFUL

The radio communication protocol used, allows a "mesh" type wireless communication network to be created. This means that the data may reach even the furthest controller via SWB-R modules linked through the intermediate controllers. In this way, the actual creation of a network is greatly simplified. To add a controller to an existing network, you just have to ensure it is within 30-40m of an individual module. If there are no SWB-R modules within communications range, a stand-alone SWB-R can be powered up half way, to boost the signal and bridge the gap. This style of network can easily cover even vast areas with controllers separated by long distances.


SAFE AND RELIABLE

Once that the installation procedure has been performed successfully, the network consisting of SWB modules will automatically close the access to any other foreign wireless device which may work on the same radio channel. In this way no interference and intrusions of any type are possible and therefore data reliability and integrity are ensured.

FLEXIBLE

The SWB modules may be used to create a fully wireless network (a module for each controller); to connect segments of a cabled RS485 line to the wireless network (more controllers with RS485 port connected to an SWB-R module), or to add individual controllers to an existing network without laying additional cables.

SWB-R MODULE

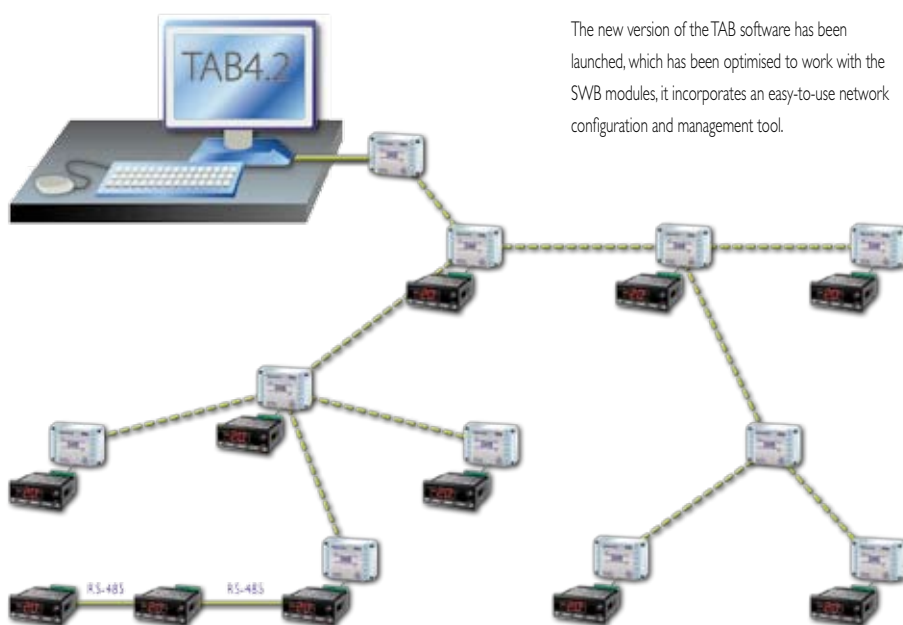

The new version of the TAB software has been launched, which has been optimised to work with the SWB modules, it incorporates an easy-to-use network configuration and management tool.

TECHNICAL SPECIFICATIONS OF SWB MODULES

- Radio frequency band: ISM 2.4GHz
- Range: up to 40m indoor with obstacles
- Serial port SWB-C: RS232 on DB-9 connector
SWB-R: selectable TTL/RS485, on Amprmodu II 4-way connector
- Max. number of peripherals on RS485 port: 63
- LED's: power supply / associated to network, serial port transmission, serial port receive
- Power supply: 230Vac/3W
- Dimensions: 110x75x53 mm

COMPONENTS OF THE SYSTEM TO BE ORDERED

- TAB4.2 software
- SWB-C module, PC side
- SWB-R modules (one for every controller or one for every "x" controllers wired with each other through the RS485 serial line)
- Connection cable from SWB-C module to a PC
- Connection cable from SWB-R module to a controller

i.LON 100



i.LON 100 IS AN INTERNET SERVER THAT ALLOWS A SYSTEM WITH LAE ELECTRONIC CONTROLLERS TO BE SUPERVISED VIA INTERNET.

IT CARRIES OUT FUNCTIONS OF DATA ACQUISITION, DATA LOGGING, ALARM MANAGEMENT, SENDING OF MESSAGES AND PROGRAMMING OF EVENTS. THE SERVER CONFIGURATION, ALL THE ACQUIRED DATA AND THE CONTROLLER PARAMETERS ARE ACCESSED VIA WEB BROWSER FROM ANY COMPUTER ANYWHERE PROVIDED IT IS CONNECTED TO THE LOCAL NETWORK OR TO INTERNET. IN ADDITION TO THE EXISTING INTEGRATED WEB PAGES, IT IS ALSO POSSIBLE TO CREATE AND INSERT CUSTOMIZED PAGES THAT GIVE A BETTER REPRESENTATION OF THE SYSTEM AND RELATIVE DATA.

LAE PROVIDES FILES THAT ALREADY CONTAIN THE BASIC INFORMATION FOR ITS CONTROLLERS AND THAT MAY BE LOADED DIRECTLY INTO **i.LON 100** TO FACILITATE SYSTEM CONFIGURATION PROCEDURES.

WHAT IS MORE, **i.LON 100** MAY BE CONNECTED TO ANY OTHER LONWORKS® AND MODBUS DEVICE SO AS TO BE ABLE TO MONITOR UNITS FITTED WITH OTHER MANUFACTURERS' CONTROLLERS THAT MAY HAVE ALL SORTS OF FUNCTIONS, SUCH AS AN AIR-CONDITIONING SYSTEM CONTROL. THERE ARE ALSO 2 DIGITAL INPUTS AND 2 OUTPUTS ON RELAY AVAILABLE.

THE MAIN FUNCTIONS OF i.LON 100:

DATA LOGGING

The data to be stored and the frequency of storage may be chosen. Text format may even be used for the created files (importable directly from applications such as Excel) or compressed format, which allows a considerable saving of storage space. When the data files reach a certain fill level, **i.LON 100** can send them as an attachment to an e-mail message and therefore always keep the storage available for subsequent data without anyone needing to act. The stored data are also visible in real time via the integrated Web page.

ALARM MANAGEMENT


During configuration it is necessary to define the sources and the conditions that must determine an alarm event and the actions that must follow: it is possible to send an e-mail, which indicates the alarm and sends data in an attachment, to set a controller parameter or to activate a relay. All the alarm events may be recorded in a log file.

PROGRAMMING OF EVENTS

This function may be used to program the value that certain controller parameters or commands must assume on certain days and at certain times. This, for example, allows the automatic management of defrost starts at fixed times or the switching on and off of the refrigerator lights according to the shop opening days and hours.



Echelon, **i.LON 100** and **LONWORKS** are registered trademarks of Echelon Corporation.

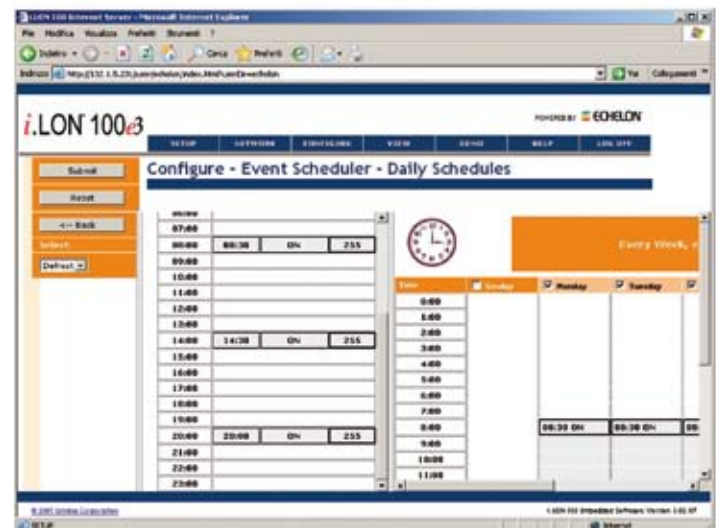

TEMPERATURE PROBES

SN2K..P

Sensor type:	NTC2K, 2000Ω @ 25°C
Range:	-40÷105°C
Accuracy:	±0.3°C @ 25°C
Sheath:	Ø6x34mm; TPE
Cable:	2 wires x 0.35mm ² ; -40÷105°C; TPE; points
Protection:	IP67

SN4K..P


Sensor type:	NTC10K, 10000Ω @ 25°C
Range:	-40÷105°C
Accuracy:	±0.3°C @ 25°C
Sheath:	Ø6x34mm; TPE
Cable:	2 wires x 0.35mm ² ; -40÷105°C; TPE; points
Protection:	IP67

ST1K..C/P

Sensor type:	KTY81-121, 990Ω @ 25°C
Range:	-40÷105°C
Accuracy:	±1.5°C @ 25°C
Sheath:	Ø6x34mm; TPE
Cable:	2 wires x 0.35mm ² ; -40÷105°C; TPE; connector or points
Protection:	IP67

ST1N..P-

Sensor type:	KTY81-121, 990Ω @ 25°C
Range:	-40÷110°C
Accuracy:	±1.5°C @ 25°C
Sheath:	Ø7x40mm; nylon6
Cable:	3 wires x 0.22mm ² ; screen; -40÷110°C; PETE; points
Protection:	IP67

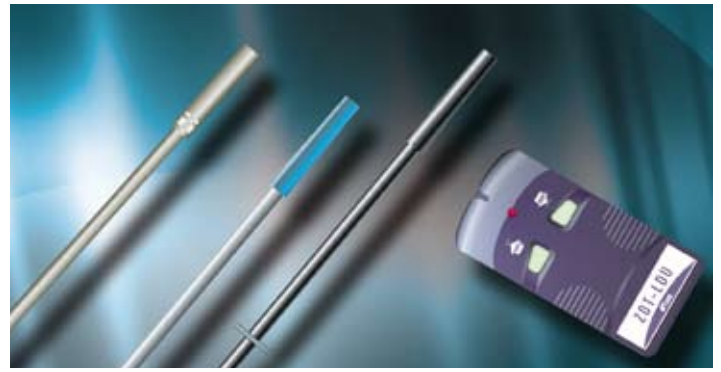

PROGRAMMING KEY

ZOT - ZERO OPERATOR'S TIME

Ergonomic device for easy end-of-the-line controller configuration ● Permanent memory of stored setup values ● Can communicate with TTL and RS485 ports ● Requires no battery

TECHNICAL DATA

Communication port:	TTL and RS485
Connection:	4-pin connector
Power supply:	from the connected instrument
Consumption:	0.2W (5Vdc)
Front Protection:	IP20
Dimensions:	41x20x88 mm

HUMIDITY TRANSMITTERS

HT2WAD


Sensor type:	Capacitive
Output signal:	0÷1Vdc
Range:	0%÷100%r.H
Accuracy:	±5%r.H. (25%÷75%r.H.)
Sheath:	Ø14x40mm
Protection:	IP65 (electronics)
Operating temperature:	0÷75°C (sensor) / 0÷50°C (electronics)
Dimensions of the enclosure:	110x53x75mm (electronics)
Power supply:	12Vdc, 0.2W



HUMIDITY AND TEMPERATURE TRANSMITTER

HT2WSE

Sensor type:	Capacitive
Output signal:	RS485
Range:	0%÷100%r.H / 0÷70°C
Accuracy:	±5%r.H. (25%÷75%r.H.) / ±0.3°C @ 25°C; ±1°C (0÷70°C)
Sheath:	Ø14x40mm
Protection:	IP65 (electronics)
Operating temperature:	0÷75°C (sensor) / 0÷50°C (electronics)
Dimensions of the enclosure:	110x53x75mm (electronics)
Power supply:	12Vdc, 0.2W

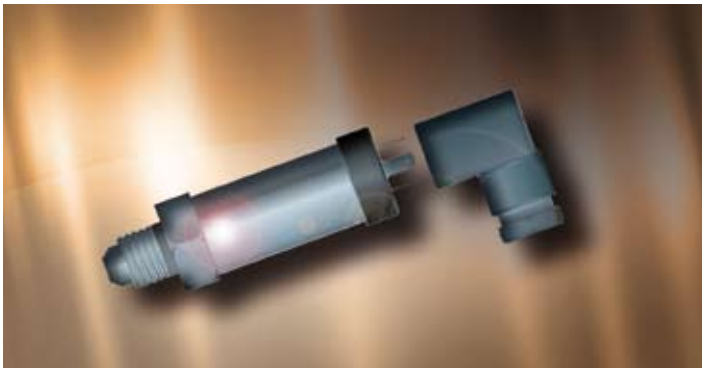

PRESSURE TRANSMITTER


PGT35

Sensor type:	Piezoresistive gauge
Output:	4÷20mA
Range:	0÷30 bar
Accuracy:	max±1%FS (0÷50°C)
Sheath:	Ø17x58 mm
Connections:	mPm connector
Pressure port:	7/16"-20UNF male, steel AISI 316L
Protection:	IP65
Ambient temperature:	-40÷100°C
Power supply:	8÷32Vdc



S-28-FB

FIXING BAR FOR 28 SERIES

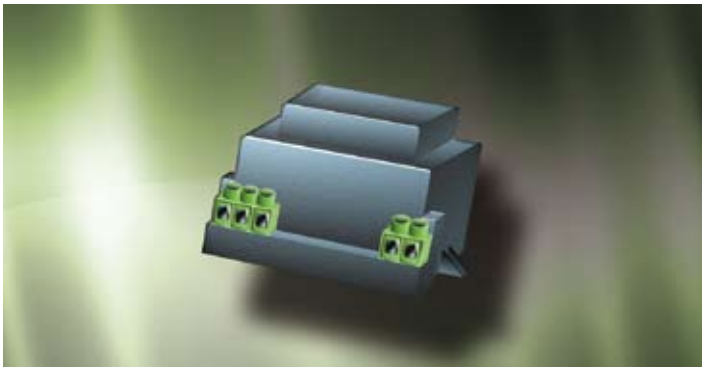

TRE24

VOLTAGE CONVERTER

TECHNICAL DATA

Power supply:	16..36Vdc
Output:	12Vdc
Max. current:	250mA
Max. power:	3W
Dimensions:	60.5X48X36 mm (WxHxD)

Transformers

Code	Voltage of primary	Voltage of secondary	Frequency	Power	Dimensions (WxHxD mm)	Overtemp. protection	Approvals
TR230	230Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		ENEC
TR230F	230Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36	✓	ENEC
TR240	240Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		ENEC
TR110	110Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		
TR115	115Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		UL
TR24/12V	24Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		



LOTS OF OPTIONS, JUST ONE CHOICE.



www.lae-electronic.com