

# ZETA II

- Competitive IP65 weatherproof range
- Shallow and unobtrusive profile
- Simple first fix base with removable gear tray
- Exit legend kit available
- EasiCheck™ central addressable self-test options
- Available in self-contained, AC/DC and AC mains slave versions

Zeta II continues to be popular for many types of installations. The shallow, unobtrusive profile neatly blends into any environment and is further enhanced by the semi-recessing trim plate. Competitively priced, Zeta II has full BSI Kitemark and ICEL approvals as well as an IP65 weatherproof rating. The range also includes central addressable self-test and slave variants, all with an easy to install first fix base and removable gear tray. Whether it is being utilised in offices, pubs, corridors or exterior locations, Zeta II delivers dependable safety at a value for money price level.



#### WHERE TO USE ZETA II

- Offices
- Hospitals
- Hotels and pubs
- Corridors
- Toilets
- Exterior locations
- Industrial units and factories
- Universities, schools and colleges



### LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




### MATERIALS

- Base - flame retardant ABS, white finish
- Diffuser - linear reeded clear polycarbonate
- Gear tray - steel, powder coated in Permawhite finish
- Recessing trim plate - steel, powder coated in Permawhite finish
- Batteries (self-contained versions) - sealed nickel cadmium

### INSTALLATION NOTES

- Suitable for ceiling or wall mounting
- BESA entry drill-outs on rear. Cable entries on ends
- Gear tray and diffuser clip into position. Removal requires tool to release clips
- Supplied complete with 1 x 8W lamp

### DIMENSIONS

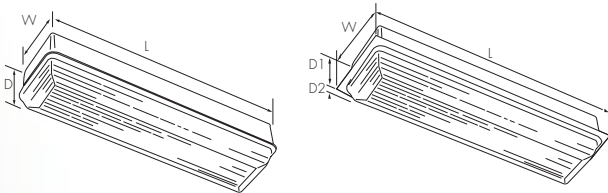

Style	L (mm)	W (mm)	D/D1 (mm)	D2 (mm)	Cut out (mm)
Surface mounted	351	95	75	-	-
Semi-recessed	390	132	31	44	345x85

### CATALOGUE NUMBERS

System Mode	Cat. No.	Weight (kg)
Non-maintained	ZE8/3/ICEL	1.20
Maintained	ZE8/3M/ICEL	1.30
24V AC/DC Central system slave	ZE8/24	0.90
50V AC/DC Central system slave	ZE8/50	0.90
110V AC/DC Central system slave	ZE8/110	0.90
230V AC Static inverter system slave	ZE8/230	0.90
Description	Cat. No.	Weight (kg)
Semi-recessing mounting bezel	ZE8/FM	0.10
European format self-adhesive legend kit	ZE/LK	0.05

Also available with EasiCheck™ automatic testing functionality - see page 195 for system features  
Contact our Technical Support and Application department for further details - 01302 303350



### OPTIONS

- Maintained and non-maintained operation, 3 hour duration
- EasiCheck™ addressable testing. System detailed on page 195
- Central system slave versions
- Semi-recessing flanged bezel attachment

### SPECIFICATION

Self contained - To specify state: BSI Kitemarked and ICEL registered, IP65 self contained emergency luminaire, with ABS base, clip-in gear tray and polycarbonate clip-on diffuser, as JSB Zeta II range, part no. \_\_\_\_\_

Slave - To specify state: Central system compatible slave, IP65 emergency luminaire, with ABS base, clip-in gear tray and polycarbonate clip-on diffuser, as JSB Zeta II range, part no. \_\_\_\_\_

### PHOTOMETRIC DATA

Luminaire type	Mounting height (m)	Escape route 2m wide 1 lux min					Open (anti-panic) area 0.5 lux min		
		1	2	3	4	5	1	2	3
<b>Self-contained</b>									
NM	2.5	1.7	5.4	4.9	1.6	1.8	7.2	5.6	0.9
	3.0	1.6	5.2	4.8	1.3	1.8	7.2	6.0	0.9
	4.0	-	-	-	-	1.6	7.5	6.5	1.4
M	2.5	1.5	5.0	4.6	1.4	1.7	7.0	5.4	1.5
	3.0	1.3	4.8	4.4	1.0	1.6	7.0	5.7	1.5
	4.0	-	-	-	-	1.4	7.0	6.2	1.1
<b>Slave</b>									
AC/DC	2.5	2.5	7.2	6.0	2.3	2.6	7.4	5.3	2.1
	4.0	1.0	7.0	6.7	1.9	2.5	7.5	6.3	2.3
	6.0	-	-	-	-	1.8	7.0	6.6	1.8
AC/AC	2.5	3.0	8.4	6.0	2.6	2.9	10.9	7.0	1.5
	4.0	2.9	8.4	7.6	2.6	2.9	11.8	8.7	1.9
	6.0	0.5	8.2	7.4	0.5	2.9	11.8	10.5	1.9

See page 441 for Design Guide



Zeta II legend kit